


## Anti-tracking fiber optic cable used in Israeli IDC data centers

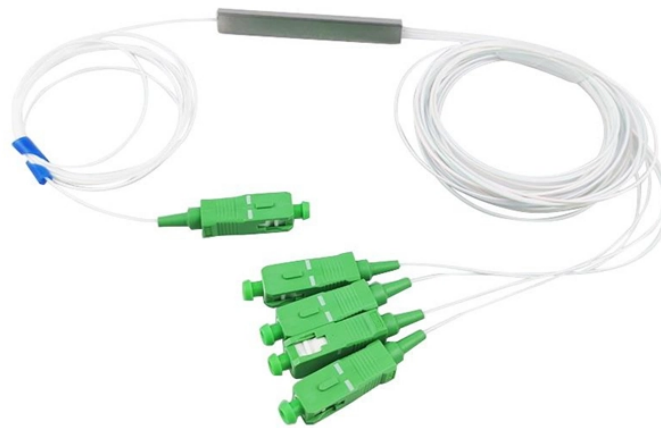

### Overview

It's strongly recommended to use anti-tracking materials when laying ADSS fiber optic cables next to equipment and facilities that handle electrical potentials of 12 kV up to 25 kV. Providing superior protection against UV radiation, fungus, abrasion and other environmental factors. Available for high voltage transmission lines for the following electric field potential ranges: 12 kV to 25 kV and higher than 25 kV up to 400 kV performance against high tension for direct-aerial. From powering 5G backhaul to interconnecting switches in hyperscale facilities, fiber optic cable assemblies are the backbone of these networks. Current high-voltage structures post a very attractive type of installation because they reduce the investment in. The cable jacket incorporates an inner polyethylene jacket (optional), aramid yarns and an outer polyethylene or AT (anti-tracking) jacket. When the induction on cable surface is above 12KV, anti-tracking sheath material (AT) is applied. ARTIC ensures a stable quality control system for our products through several programs including ISO 9001, ISO 14001 and ROHS.

## Anti-tracking fiber optic cable used in Israeli IDC data centers



Product Description: A multi-loose tube cable with a dielectric central strength member, containing up to 36 tube and each tube contain 6-12 fiber. The cable jacket incorporates an inner polyethylene jacket ...



This specification covers the design requirements and performance standard for the supply of optical fibre cable in the industry. ARTIC ensures a stable quality control system for our products through ...



Selecting the right fiber optic cable assemblies means focusing on safety, performance and long-term reliability. Features like OFNP/OFNR-rated jackets, APC connectors and application ...



Note 1: Please contact your sales agent for information about the total packaging dimensions and weight, as well as for higher fiber counts and different drum lengths available



Our job is to apply our knowledge, experience and creativity in order to help you design and implement the solutions you need in the fields of cybersecurity and fiber optic applications.



It's strongly recommended to use anti-tracking materials when laying ADSS fiber optic cables next to equipment and facilities that handle electrical potentials of 12 kV up to 25 kV.



This article explains the different types of fiber optic cables used in data centers — from single-mode to MPO/MTP — and why proper selection, installation, and maintenance are crucial for avoiding data ...



The cable consists of loose tubes containing single mode fibers surrounded by a non-metal central strength member. An anti-tracking material is used as the inner sheath, and Kevlar yarns are applied ...



Their products offer comprehensive optical layer transport solutions, including muxponders, transponders, and optical amplifiers, which enhance fiber utilization and support secure data transfer.



Discover our Anti-Tracking Cables, designed to prevent electrical tracking and ensure safety and reliability in high-voltage applications.

## Contact Us

For more information, pricing, or custom energy solutions, please contact us:

Website: <https://www.gdroofing.co.za>

Email: [sales@gdroofing.co.za](mailto:sales@gdroofing.co.za)

Phone: +27 72 418 9365

Address: 22 Electron Avenue, Isando, Johannesburg, 1600, South Africa

This document is for informational purposes only. Specifications subject to change without notice.

