


Croatia FOB Tunable Optical Module QSFP-DD



Croatia FOB Tunable Optical Module QSFP-DD

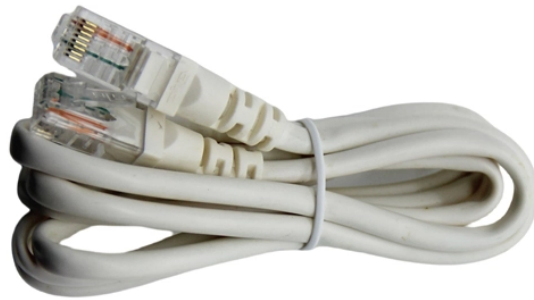

It provides high-speed data channels, IIC interface module control and state alarm reporting with 3.3 V power supplied. The QSFP-DD coherent optical module uses a 76-pin connector as an electrical ...



July 11, 2019 - QSFP-DD Hardware Specification for QSFP DOUBLE DENSITY 8X PLUGGABLE TRANSCEIVER - Rev 5.0 May 8, 2019 - Common Management Interface Specification - Rev 4.0



It provides high-speed data channels, IIC interface module control and state alarm reporting with 3.3 V power supplied. The QSFP-DD coherent optical module uses a 76-pin connector as an electrical ...



The 400G QSFP-DD ZR+ HO coherent transceiver is compliant with the OIF 400ZR and OpenZR+ standards. Digital diagnostic functions are available via I2C interface as specified by the ...




Powered by Greylock and Delphi DSP ASICs, and silicon photonic integrated circuits (PICs) for an optimized co-packaged design with 3D Siliconization. Supports an expansive list of interoperability ...



By plugging Coherent's high transmit output power 400G QSFP-DD-DCO ...



The QSFP-DD DWDM OIF 400ZR MSA Coherent transceiver is designed for use in Data center interconnections (DCIs) links over single mode fiber. They are compliant with QSFP-DD MSA and ...



Supporting 40km unamplified or 120km amplified over single-mode fiber with tunable C-Band channels (Ch.13-61), this module delivers 10 dB link budget at 425 Gbps with built-in DSP. LC/UPC duplex for ...



The 400G QSFP-DD ZR+ is a C-Band optical frequency tunable coherent optical module, combines 7nm coherent DSP ASIC functionality with best in class ultra-narrow line-width tunable ...



The module is QSFP-DD type2 size (18.4 mm x 93.4 mm x 8.5 mm) and hot pluggable by a 76-pin connector. The maximum power consumption is 16.5 W and power supply voltage is +3.3V.



Ascent's 400G ZR+ QSFP-DD Digital Coherent Optic Modules are 400 Gb/s Quad Small Form Factor Pluggable- double density (QSFP-DD) transceivers designed for 480 km optical ...



The 400G QSFP-DD ZR+ is a C-Band optical frequency tunable coherent optical module, that combines 7nm coherent DSP ASIC functionality with best-in-class ultra-narrow line-width tunable lasers, high ...



By plugging Coherent's high transmit output power 400G QSFP-DD-DCO transceivers directly into their switches or routers, network operators can remove the intermediate transponder/muxponder ...

Contact Us

For more information, pricing, or custom energy solutions, please contact us:

Website: <https://www.gdroofing.co.za>

Email: sales@gdroofing.co.za

Phone: +27 72 418 9365

Address: 22 Electron Avenue, Isando, Johannesburg, 1600, South Africa

This document is for informational purposes only. Specifications subject to change without notice.

