


Handheld Single-Mode Optical Attenuator



Handheld Single-Mode Optical Attenuator

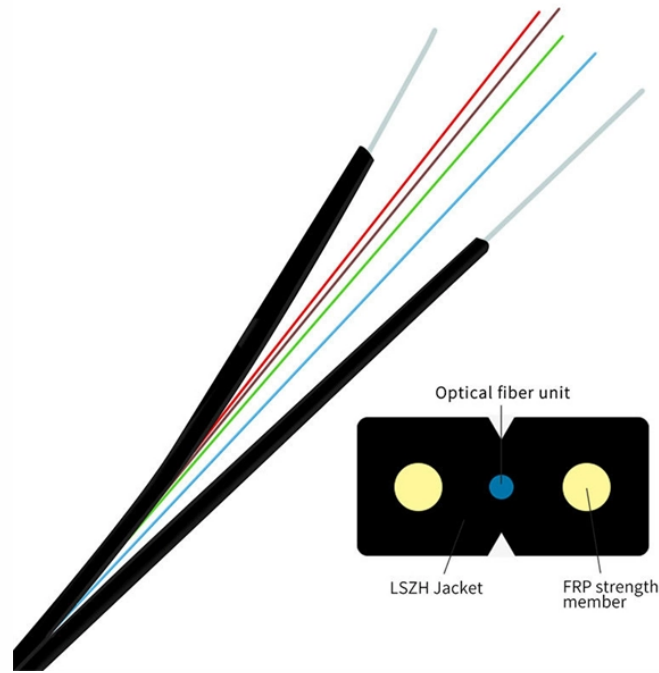

Kingfisher's KI 7010 Series of handheld fiber optic variable attenuators are precision instruments commonly used for testing optical system margin, linearity and sensitivity of optical transmission ...



As optical passive devices, our attenuators are mainly used in fiber optic to debug optical power performance & optical instrument calibration correction & fiber signal attenuation to ensure the optical ...



The KI 7010B hand held Fiber Optic Variable Attenuator is a precision handheld instrument commonly used for testing single mode fiber systems for optical system margin and linearity.



NOYES SVA1 handheld variable optical attenuator is suited for a wide range of single-mode fiber link certification and production test applications. The SVA1 attenuator offers high bi-directional return ...



Thorlabs has a wide variety of single mode (SM), polarization-maintaining (PM), or multimode (MM) fixed and variable optical attenuators (VOAs). We offer SM and PM electronic VOAs that provide control of ...



FS fixed and variable fiber optic attenuators with leading attenuating fibers guarantee consistent and stable fiber attenuation (0~60dB) in WDM transmission.



Fiberinthebox variable attenuator instrument - Handheld optical variable attenuator is a compact, portable instrument widely used in fiber link certification and routine maintenance.



As optical passive devices, our attenuators are mainly used in fiber optic to debug ...



We offer a high performance handheld instrument with excellent overall specifications, and automation features that are useful in either stand-alone or computer controlled situations, or an inexpensive in ...



VOA100 Handheld Variable Optical Attenuator. VOA, single mode, 2 ~ 60dB, Calibrated wavelengths: 1310/1490/1550/1625nm, 0.05dB step size. Tarluz VOA100 handheld optical variable attenuator is ...



Intended for field testing during installation, new equipment turn-ups, or routine maintenance, the SVA1 is a complete, easy to use attenuator. Its unique features allow bidirectional signal transmission with ...

Contact Us

For more information, pricing, or custom energy solutions, please contact us:

Website: <https://www.gdroofing.co.za>

Email: sales@gdroofing.co.za

Phone: +27 72 418 9365

Address: 22 Electron Avenue, Isando, Johannesburg, 1600, South Africa

This document is for informational purposes only. Specifications subject to change without notice.

