


# **Israeli Tunable Optical Module QSFP**



## Israeli Tunable Optical Module QSFP

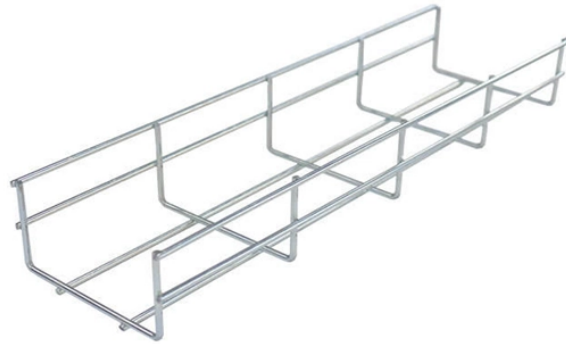

The TQ2025-TUNC-SO is a pluggable QSFP28 DWDM transceiver designed for high capacity 100 Gigabit Ethernet (100GbE) Data Center Interconnect (DCI) optical communication applications up to ...




The availability of 100ZR coherent tunable DWDM (Dense Wavelength Division Multiplexing) transceivers in a QSFP28 form factor marks a significant ...



The Hyper photonix 400G QSFP-DD ZR+ transceiver is a high performance, cost effective module for optical data communication applications from 100G to 400G.



The emerging OIF 400ZR and Open ZR+ MSA coherent transceivers in QSFP-DD and OSFP form factors generally have low transmit output power (-10 dBm), making them incompatible with ROADM ...




Prominent feature Cisco 800G ZR/ZR+ coherent optics modules deliver high performance and low power in QSFP-DD and OSFP form factors.



This DCO module is tunable across C-band. The module is compatible with widely deployed ports of QSFP28 100G and 100GBASE ER CAUI-4 client interfaces. Its maximum ...



The 400G QSFP-DD ZR+ is a C-Band optical frequency tunable coherent optical module, combines 7nm coherent DSP ASIC functionality with best in class ultra-narrow line-width tunable ...



It provides high-speed data channels, IIC interface module control and state alarm reporting with 3.3 V power supplied. The QSFP-DD coherent optical module uses a 76-pin connector as an electrical ...



The 400G ZR is a C-band 75G/100 GHz grid coherent optical module that combines coherent DSP ASIC functionality with best in class ultra-narrow line-width tunable lasers, high speed modulators and high ...



400GBASE ZR+ QSFP-DD Hyper Silicon TM Optical Transceiver Features Compliant with QSFP-DD MSA, Type 2B package Compliant with Open ZR+ MSA and OIF 400ZR MSA, support OFEC and ...



The emerging OIF 400ZR and Open ZR+ MSA coherent transceivers in QSFP-DD ...



Digital Coherent Optics module, hot- pluggable QSFP28 form factor. Transmission reach: Up to 80km unamplified (loss limited) Up to 120km amplified (dispersion limited, optionally extendable to 300km) ...

## Contact Us

For more information, pricing, or custom energy solutions, please contact us:

Website: <https://www.gdroofing.co.za>

Email: [sales@gdroofing.co.za](mailto:sales@gdroofing.co.za)

Phone: +27 72 418 9365

Address: 22 Electron Avenue, Isando, Johannesburg, 1600, South Africa

This document is for informational purposes only. Specifications subject to change without notice.

