


# **Moroccan OLT Optical Line Terminal QSFP-DD**



## Moroccan OLT Optical Line Terminal QSFP-DD

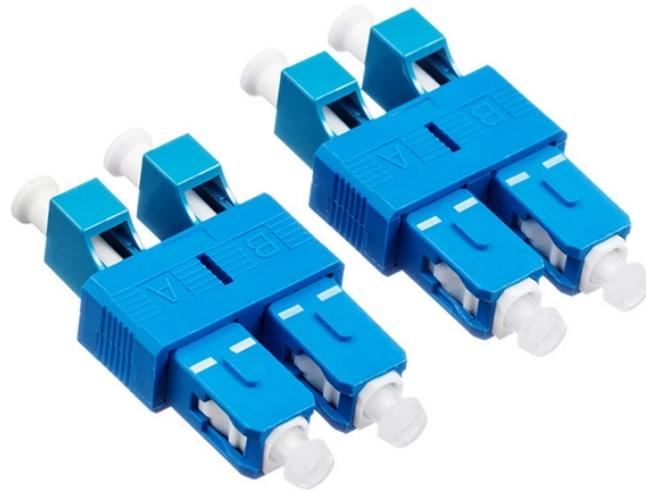

The QSFP-DD family supports legacy QSFP channels on the front interface and four additional channels on the rear interface. This interconnect system optimizes density and power ...




QSFP-DD Interconnect System enables faceplate density equal to the current 2x1 QSFP form factor, but with 8-lane ports. In other words, a total of 256 differential pairs with 32 ports delivers double-lane ...



Superxon 50GPON Triple OLT transceivers, compliant with QSFPDD MSA, support single-fiber bi-directional data links with multiple TX and RX rates: 49.7664Gbps, 24.8832Gbps, 12.4416Gbps, ...



This latest offering from Cisco, the QSFP-DD OLS, is a “pluggable open line system” solution that perfectly integrates into the Cisco Routed Optical Networking architecture by hosting line system ...



This “pluggable open line system” perfectly integrates into the Cisco ...



The 400G QSFP-DD XDR4 module has a longer transmission distance than the 400G QSFP-DD DR4 module and supports single-mode fiber with a maximum link length of up to 10km ...



Simplify the optical layer for Routed Optical Networking. Integrated optical amplifier in a QSFP-DD pluggable provides signal boost without external amplifier shelves. Combine multiple DWDM ...



Quad small form pluggable double density (QSFP-DD) transceivers maximize port economy and density by utilizing multiple lanes of data. QSFP-DD fiber transceivers utilize eight lanes as opposed to the ...



July 11, 2019 - QSFP-DD Hardware Specification for QSFP DOUBLE DENSITY 8X PLUGGABLE TRANSCEIVER - Rev 5.0 May 8, 2019 - Common Management Interface Specification - Rev 4.0



The QSFP-DD-OLS has two bidirectional optical ports: the COM-RX/TX that shall be connected to the Multiplexer / Demultiplexer units, and the LINE-TX/RX that shall be connected to the fiber link.



The QSFP-DD-OLS has two bidirectional optical ports: the COM-RX/TX that shall be connected to the Mux/DMX unit, and the LINE-TX/RX that shall be connected to ...

## Contact Us

For more information, pricing, or custom energy solutions, please contact us:

Website: <https://www.gdroofing.co.za>

Email: [sales@gdroofing.co.za](mailto:sales@gdroofing.co.za)

Phone: +27 72 418 9365

Address: 22 Electron Avenue, Isando, Johannesburg, 1600, South Africa

This document is for informational purposes only. Specifications subject to change without notice.

